



Tairus Supra Rubine BL-T

Exhaustion Dyeing 浸 染





Dyes Properties 染料特性

Classification S.D.C.分類	Levelling 均染性	Solubility 80 °C 溶解度	Liquor ratio 浴 比	High Temp. 高溫染色	Build up 上色性
B	⊙	60 g/l	⊙	⊙	⊙

Exhaustion 浸染適性	Continuous 連染適性	Printing 印花適性
⊙	⊙	⊙

Staining on 纖維污染					
Cotton	Nylon	Wool	Rayon	Acrylic	PES
1	3	1	1	4~5	5

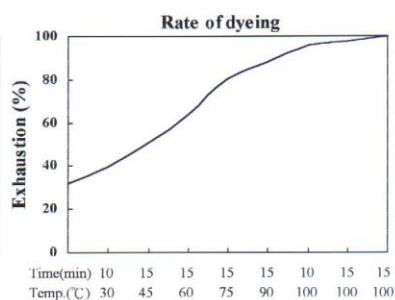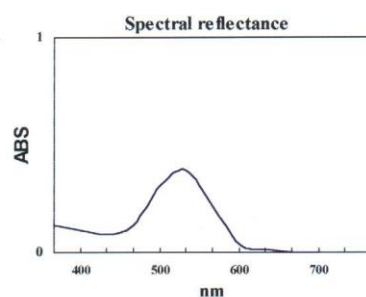



Tairus Supra Rubine BL-T

Washing Properties 水洗特性 (2.0 % o.w.f.)

49°C (AATCC 61 2A) 49°C 耐水洗						Water 耐水	
Acetate	Cotton	Nylon	Polyester	Acrylic	Wool	Alter 色變	Cotton 污染
5	3	4~5	5	5	5	4	4~5

60°C (M&S C4A) 60°C 耐水洗						See Water 耐海水	
Acetate	Cotton	Nylon	Polyester	Acrylic	Wool	Alter 色變	Cotton 污染
5	2~3	4~5	5	5	5	5	5

Color Fastness 堅牢度 (2.0 % o.w.f.)

Dry Cleaning 耐乾洗		Chlorine Water 耐氯水		Perspiration 耐汗 Acid 酸	
Alter 色變	Cotton 污染	Alter 色變	Cotton 污染	Alter 色變	Cotton 污染
5	5	4	5	5	5

Light 耐光		Rubbing 耐摩擦		Perspiration 耐汗 Alkaline 鹼	
0.2 % o.w.f.	2.0 % o.w.f.	Dry 乾	Wet 濕	Alter 色變	Cotton 污染
5~6	6	4~5	3	5	5

Printing Properties 印花特性

Reduction agent 還原劑 Dischargeability 拔染性	Dependence on Steaming 蒸處依存性		Dependence on Steaming Process 適用蒸處方式	
○ ~ Δ	Temperature	Time	IIPS	HTS
	◎ ~ ○	◎ ~ ○	◎	○