



## Taiacryl Black FDL-T 200%

Exhaustion Dyeing 浸染



0.5 % o.w.f.



1.0 % o.w.f.





2.0 % o.w.f.

### Dyes Properties 染料特性

f value f 值	K value K 值	Solubility 85 °C 溶解度	Liquor ratio 浴比	Rate of Dyeing 染色速率	Build up 上色性
0.52	3	150 g/l	◎	◎	◎

Staining on 纖維污染					
Cotton	Nylon	Wool	Acrylic	Silk	Polyester
5	5	5	1	5	5

Exhaustion 浸染適性	Continuous 連染適性	Printing 印花適性
◎	◎	◎

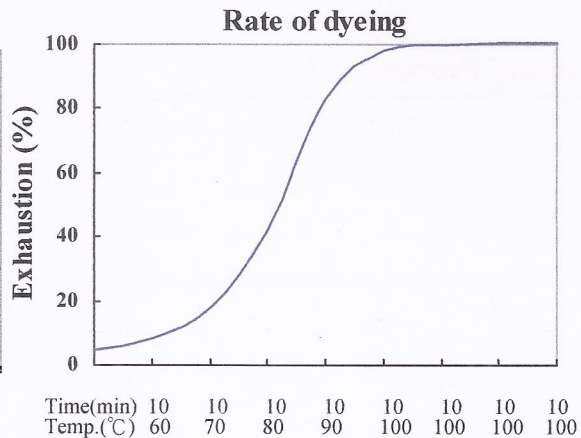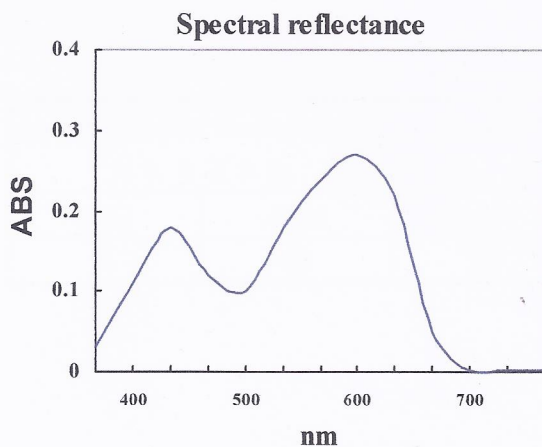



## Taiacryl Black FDL-T 200%

### Washing Properties 水洗特性 (2% o.w.f.)

49°C (AATCC 61 2A) 49°C 耐水洗						Water 耐水	
Acetate	Cotton	Nylon	Polyester	Acrylic	Wool	Alter 色變	Nylon污染
5	5	5	5	5	5	5	5

60°C (M&S C4A) 60°C 耐水洗						See Water 耐海水	
Acetate	Cotton	Nylon	Polyester	Acrylic	Wool	Alter 色變	Nylon污染
5	5	5	5	5	5	5	5

### Color Fastness 堅牢度 (2% o.w.f.)

Saliva 耐唾液		Chlorinated Water 耐氯水		Perspiration 耐汗 Acid 酸	
Alter 色變	Nylon污染	Alter 色變	Nylon污染	Alter 色變	Nylon污染
5	5	5	5	5	5

Light 耐光		Rubbing 耐摩擦		Perspiration 耐汗 Alkaline 鹼	
0.5% o.w.f.	2.0% o.w.f.	Dry 乾	Wet 濕	Alter 色變	Nylon污染
6	7	5	5	5	5

### Printing Properties 印花特性

Reduction agent 還原劑 Dischargeability 拔染性		Dependence on Steaming 蒸處依存性		Dependence on Steaming Process 適用蒸處方式	
Decrolin	SnCl <sub>2</sub>	Temperature	Time	HPS	HTS
X	X	⊙	⊙	⊙	X